

## 96629370 KAT SQ 2000-840 HF

LED 16W KATO_HO_84	CB	IP65	IK10	CE	850°C	T <sub>a</sub> -15 +35
--------------------	----	------	------	----	-------	---------------------------


### Katona

A very slim, square functional LED luminaire. Fixed output LED driver. Body: white polycarbonate. Diffuser: opal polycarbonate. Class II electrical, IP65, IK10. Complete with 4000K LED. Suitable for direct mounting to wall or ceiling. Loop-in, loop-out is possible for cables up to 2.5mm<sup>2</sup>. BESA compatible.


Dimensions: 277 x 277 x 58 mm  
Luminaire input power: 16.3 W  
Luminaire luminous flux: 1950 lm  
Luminaire efficacy: 120 lm/W  
Weight: 0.99 kg



TLG\_KATO\_F\_SQ\_PDB.jpg

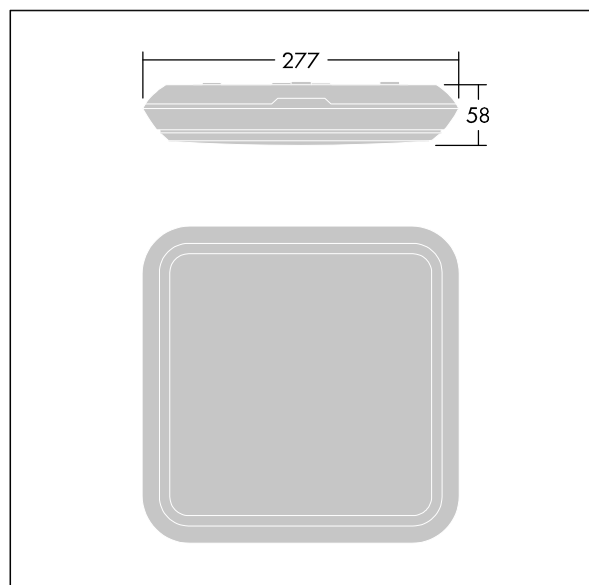

TLG\_KATO\_M\_SQ\_LDS.wmf

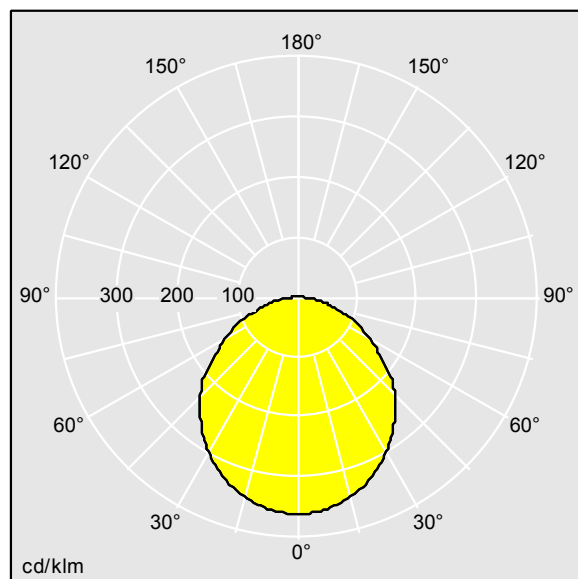

TLG\_SP\_0043594.idt

Lamp position: STD - standard  
Light Source: LED  
Luminaire luminous flux\*: 1950 lm  
Luminaire efficacy\*: 120 lm/W  
Lamp efficacy: 119 lm/W  
Colour Rendering Index min.: 80  
Ballast: 1 x 87500566 DRV TR LC 20W 500MA fixC C  
SNC

Correlated colour temperature: 4000 Kelvin  
Chromaticity tolerance (initial MacAdam): 3  
Rated median useful life\*:  
L80 50000h at 35°C  
Luminaire input power\*: 16.3 W Power factor = 0.91  
Dimming: FIX  
Maintenance category: E - Dust-proof IP5X  
LOR: 1,00 ULOR: 0,03 DLOR: 0,97

All values marked with an \* are rated values. Thorn uses tried and tested components from leading suppliers, however there may be isolated instances of technology-related failures of individual LEDs during the rated product lifetime. International standards set the tolerance in initial flux and connected load at  $\pm 10\%$ . Unless stated otherwise, the values apply to an ambient temperature of 25°C.

In most products the failure of one LED point causes no functional impairment to the lighting performance of the luminaire and is therefore no reason for complaint. Unless otherwise stated all Thorn LED products are suitable for unrestricted use (rated RG0 or RG1) with regard photobiological blue light safety (IEC/EN60598-1).

Thorn Lighting is constantly developing and improving its products. The right is reserved to change specifications without prior notification or public announcement.  
© Thorn Lighting